



A Division of World Industrial Equipment, Inc.
"Designer & Manufacturer of Lift Equipment"



SIGNALIER ATR 41-45



4850 ORANGE AVENUE • FORT PIERCE, FL 34947
(772) 461-6056 MAIN PLANT • 1-800-226-5056 IN FLORIDA • (772) 464-2716 FAX
www.stamm-mfg.com • Email: johnny@stamm-mfg.com

Specifications and Options

GENERAL SPECIFICATIONS

Horizontal Reach	26 ft 2 in (8.0 m)	30 ft 2 in (9.2 m)
Maximum Platform Capacity	600 lbs (272 kg)	600 lbs (272 kg)
Inner Boom Extension	79 in (2.0 m)	103 in (2.6 m)
Outer/Inner Boom Articulation	-25° to +85°	-25° to +85°
Lower Boom Articulation	0° to +87°	0° to +87°
Rotation	360° Continuous	360° Continuous

WITH STANDARD PEDESTAL

Height to Bottom of Platform	36 ft 4 in (11.1 m)	40 ft 4 in (12.3 m)
Working Height	41 ft 4 in (12.6 m)	45 ft 4 in (13.8 m)
Stowed Travel Height	10 ft 6 in (3.2 m)	10 ft 6 in (3.2 m)

HYDRAULIC SYSTEM


Operating Pressure	3000 psi (207 bar)	3000 psi (207 bar)
Flow Rate	6 gpm (22.7 lpm)	6 gpm (22.7 lpm)
System Type	Open Center	Open Center

OPTIONS

- * Auxiliary Outriggers
- * Second Set of Tool Power Ports
- * Platform Elevator
- * Various Pedestal Heights
- * Automatic Boom Latch
- * Backup 12-Volt Pump
- * Hydraulic Jib/Winch
(Reduces Platform Capacity 100 lbs)
- * Jib up to 1000 lb (454 kg) Capacity



Call for Pricing
(772) 461-6056 or 1-800-226-5056

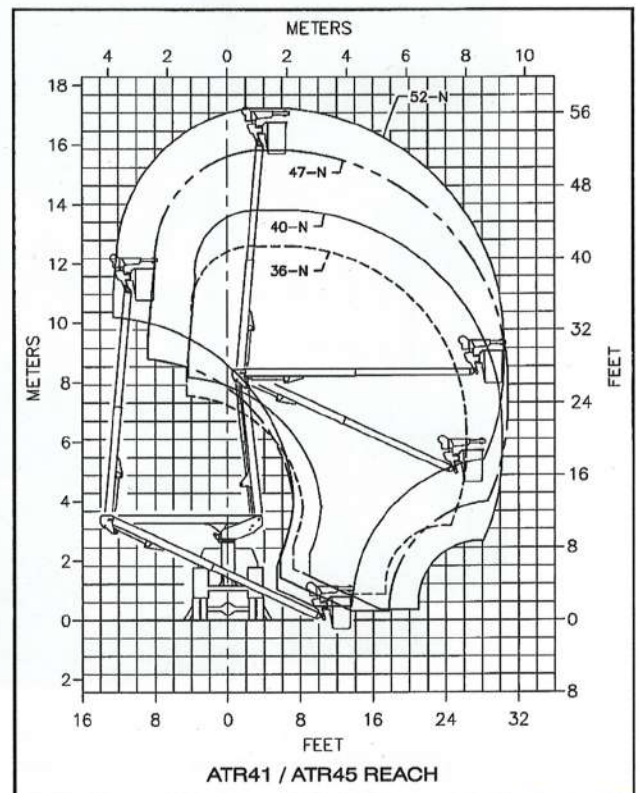



A Division of World Industrial Equipment, Inc.
"Designer & Manufacturer of Lift Equipment"



SIGNALIER **ATR 52-58**

Articulated/Telescopic Aerial Lift



4850 ORANGE AVENUE • FORT PIERCE, FL 34947
(772) 461-6056 MAIN PLANT • 1-800-226-5056 IN FLORIDA • (772) 464-2716 FAX
www.stamm-mfg.com • Email: johnnystm@stamm-mfg.com



SIGNALIER

ATR 52-58



GENERAL SPECIFICATIONS

(Based on 40" Frame)

	ATR-52	ATR-58
Horizontal Reach	30'-9" (9.4 m)	30'-4" (9.2 m)
Max Platform Capacity	500 lbs (227 kg)	500 lbs (227 kg)
Platform Rotation	180°	180°
Max Jib Capacity	1000 lbs (454 kg)	1000 lbs (454 kg)

HEIGHTS WITH STANDARD PEDESTAL

Bottom of Platform Height	46'-4" (14.1 m)	50'-6" (15.4 m)
Working Height	51'-4" (15.6 m)	55'-6" (16.9 m)
Stowed Travel Height	10'-6" (3.2 m)	10'-6" (3.2 m)

BOOM ACTION

Outer/Inner Boom Articulation	-25 to + 85°	-25 to + 85°
Inner Boom Extension	103" (2.6 m)	53" (1.35 m)
Lower Boom Articulation	0 to 84°	0 to 84°
Rotation	360°	360°

INSULATION (where applicable)

Upper Boom Insulation Gap	64" (1.6 m)	64" (1.6 m)
Lower Boom Insulation Gap	12" (305 mm)	12" (305 mm)

VEHICLE REQUIREMENTS

Cab to Axle (minimum)	84" (2.14 m)	102" (2.6 m)
GVWR	17,500 lbs (7,940 kg)	24,000 lbs (10,890 kg)

4850 ORANGE AVENUE • FORT PIERCE, FL 34947
 (772) 461-6056 MAIN PLANT • 1-800-226-5056 IN FLORIDA • (772) 464-2716 FAX
 www.stamm-mfg.com • Email: johnnystm@stamm-mfg.com